

# ***mach 1***

MODERN ENGINEERING



## SONIC LPX

LOW-PROFILE SEMI-AUTOMATIC

The *X-STRETCH* pre-stretch film carriage provides superior film economy, film tension and user safety.

- Uses 20" machine film
- Electronically adjustable film tension
- 250 % film pre-stretch ratio, others available
- Maintenance free ball bearing carriage guide
- Automatic corner compensation
- Lifetime warranted stretch rollers




The Robust *PRO-GLIDE* turntable support system is maintenance free and features superior weight capacity.

- Structural steel frame
- Forklift portable
- Very low maintenance
- Easy access to components
- ½ HP turntable drive motor
- Heavy duty turntable chain drive
- Maintenance free turntable support casters



The advanced and user-friendly *DIGI-TECH* control unit features unique functions to wrap any pallet type.

- Photo-eye automatic height detection
- Separate top and bottom wrap count 1-10
- Turntable soft start/stop
- Dual adjustable film carriage speed
- Reinforce wrap function
- Positive turntable home alignment
- Gentle cycle feature for light or unstable pallets

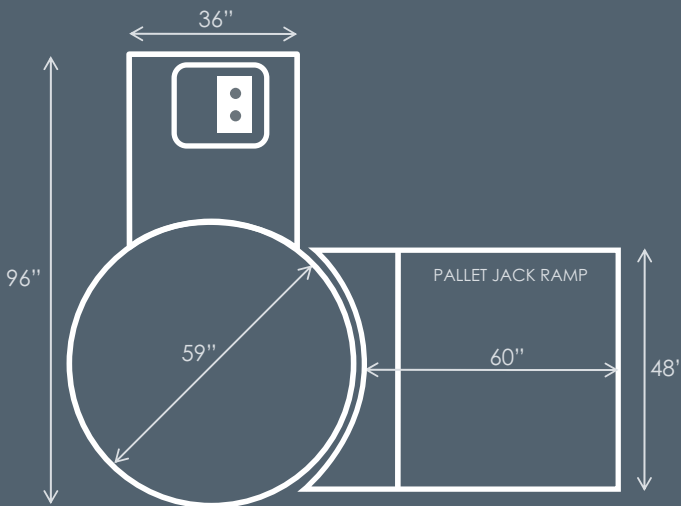

### POPULAR OPTIONS

- Standard loading ramp for pallet jack
- Extended heavy duty ramp for electrical walkie
- Wrap height extension for taller pallets
- Frame extension for larger than standard pallets
- Turntable surround deck for pit mounting
- Scale package with digital weight indicator
- Auto film cut
- 30" film carriage
- 70" diameter turntable

### TECHNICAL SPECIFICATIONS

Turntable Speed	Adjustable up to 16 RPM
Control Type	Full-Feature Semi-Automatic
Max. Load Capacity	5,000 lbs
Max. Load Height	86"
Turntable Size	59" diameter
Turntable Height	3" from floor
Pre-Stretch Ratio	250 % standard
Max. Load Size	56" x 56"
Electrical	115/1/60 15 amp
Warranty	3/5 years limited
Tower Height	85"
Clearance Required	95"

Distributed by:

