


SONIC LINE - the most versatile turntable stretch wrapper

LOW-PROFILE
SEMI-AUTOMATIC

SONIC LPX ▶



SONIC LPS ▶

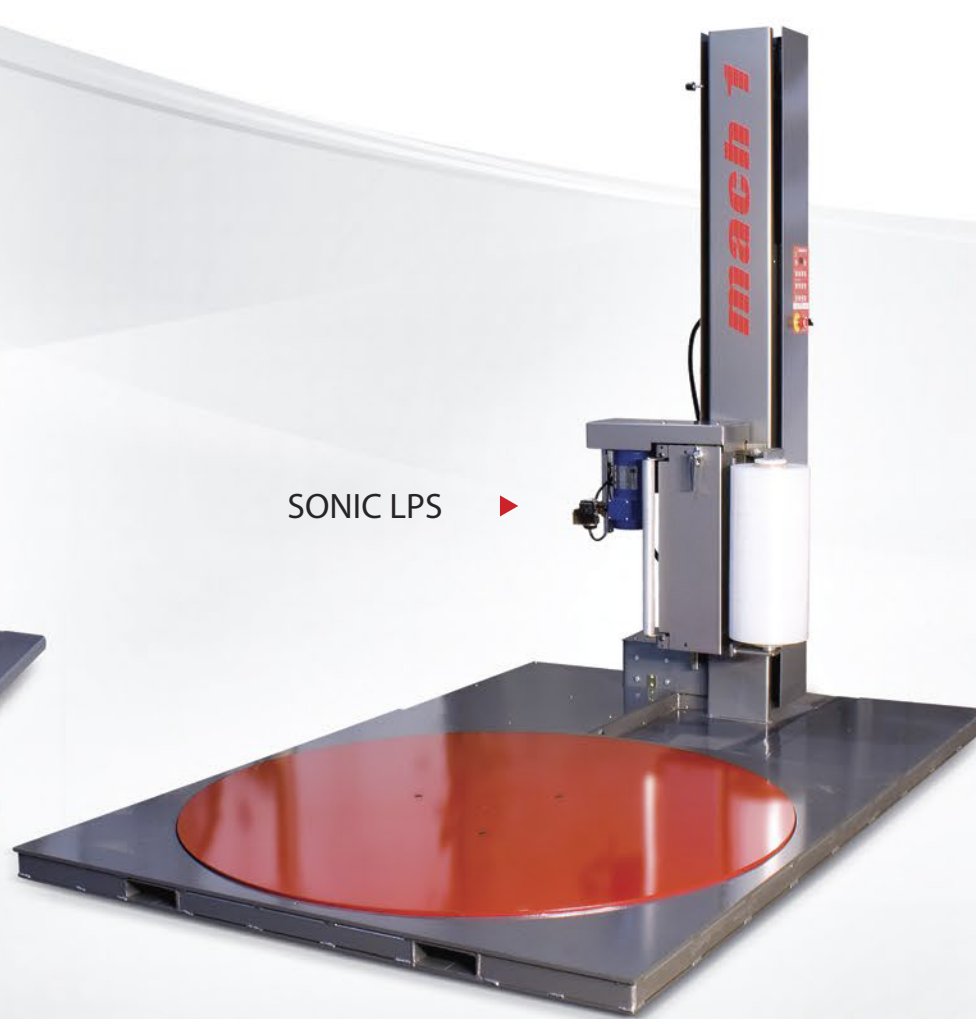

HIGH-PROFILE
SEMI-AUTOMATIC

SONIC HPX ▶



POPULAR OPTIONS (LPX / LPS)

- Standard loading ramp for pallet jack
- Extended heavy duty ramp for electrical walkie
- Wrap height extension for taller pallets
- Frame extension for longer and wider pallets
- Built-in scale package with digital weight display (LPS)
- Auto film cut
- 30" film carriage
- 70" diameter turntable



The X-TRECH pre-stretch film carriage provides superior film economy, film tension and user safety.

- Uses 20" machine film
- Electronically adjustable film tension
- 250% film pre-stretch ratio, others available
- Maintenance free ball bearing carriage guide
- Automatic corner compensation
- Lifetime warranty on stretch rollers



The Robust PRO-GLIDE turntable support system is maintenance free and features superior weight capacity.

- Structural steel frame
- Forklift portable
- Flush with floor pit mountable
- Easy access to components
- 1/2 HP turntable drive motor
- Heavy duty turntable chain drive
- Maintenance free turntable support casters (LPX, LPS)



The advanced and user-friendly DIGI-TECH control unit features unique functions to wrap any type of pallet

- Photo-eye automatic height detection
- Separate top and bottom wrap count 1-10
- Turntable soft start/stop
- Dual adjustable film carriage speed
- Reinforce wrap function
- Positive turntable home alignment
- Gentle wrap feature for light or unstable pallets

POPULAR OPTIONS (HPX)

- Wrap height extension for taller pallets
- Frame extension for larger than standard pallets
- Split base for variable pallet size
- Turntable weight capacity increase
- Scale package with digital weight indicator
- Auto film cut
- 30" film carriage
- 59" diameter turntable



TECHNICAL SPECIFICATIONS	LPX / LPS	HPX
Turntable Speed	Adjustable up to 16 RPM	Adjustable up to 16 RPM
Control Type	Full-Feature Semi-Automatic	Full-Feature Semi-Automatic
Max. Load Capacity	5,000 lbs	5,000 lbs
Max. Load Height	86"	80"
Turntable Size	59" diameter	48" x 48" octagonal
Turntable Height	3" from floor	9" from floor
Pre-Stretch Ratio	250% standard	250% standard
Max. Load Size	56" x 56"	56" x 56"
Electrical	115/1/60 15 amp	115/1/60 15 amp
Warranty	3/5 years	3/5 years
Tower Height	85"	85"
Clearance Required	97"	97"

